

Garage Site/ Canopy Lighting

YML-1GS37S Series

Models passed DLC listed:

YML-1GS37SP-40
YML-1GS37SP-60
YML-1GS37SP-80




Applications


Parking Lots, Garages, Gas Stations, Corridors, Schools, Shopping Malls, etc.

- Efficiency of chips: 150-165 lm/w, 180-195 lm/w
- LENS: Optical grade PC, anti-UV oxidation.
- Beam Angle: TYPE V
- Housing: die casting aluminum housing with excellent heat dissipation, surface treated with powder coated finish for corrosion and static resistance.
- Input voltage: 120-277 VAC, 50/60 HZ
- LED module can be dismantled separately for maintenance.
- LED driver: constant current, efficiency is up to 92%, PF ≥ 0.95.
- IP class: IP65

Dimension [Inch(mm)]

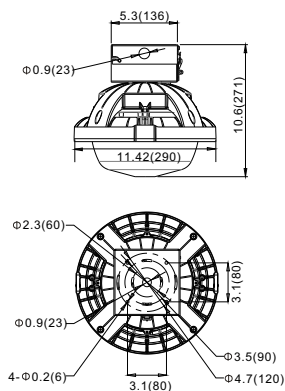

Distribution Curve Flux



Type V

Ordering Information

Example: YML-1GS37SP-40-750-G-5-1

Company code	Voltage	Type	Power	Ra	Colour Temp.	Colour Options	Optic	Options
YML	1 120~277VAC 2 200~240VAC 3 100~120VAC 4 277~480VAC 5 347~480VAC	GS37SP	40 (40W 4450Lumens) 40P (40W 5600Lumens) 60 (60W 6750Lumens) 60P (60W 8200Lumens) 80 (80W 8350Lumens) 80P (80W 10500Lumens)	7 70 8 80 9 90	27 2700K 30 3000K 40 4000K 50 5000K 57 5700K 65 6500K	G Green (standard) B Black C Coffee S Silver	5 Type V	1 0~10V dimming 2 Timing dimming 3 Occupancy sensor (dimming control/ on off control) 5 Wireless