

Street Lighting

YML-1SL02 Series

Models passed DLC listed:

YML-1SL02-40

YML-1SL02-60

YML-1SL02-90




Applications


Roadways, Freeways, Highways, Parking Lots, Off-streets Areas, etc.

- Efficiency of chips: 150-165 lm/w, 180-195 lm/w
- LENS: Optical grade PC, anti-UV oxidation.
- Beam Angle: Type II, Type III
- Housing: die casting aluminum housing with excellent heat dissipation, surface treated with powder coated finish for corrosion and static resistance.
- Input voltage: 120-277 VAC, 50/60 HZ
- LED module can be dismantled separately for maintenance.
- LED driver: constant current, efficiency is up to 92%, PF ≥ 0.95.
- IP class: IP65


Dimension [Inch(mm)]

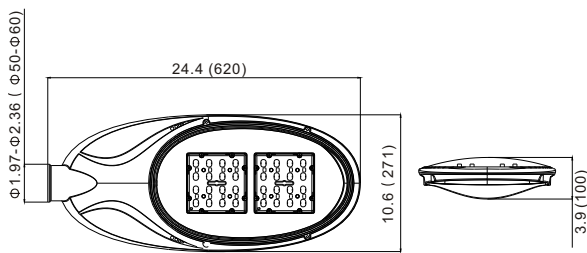

Distribution Curve Flux

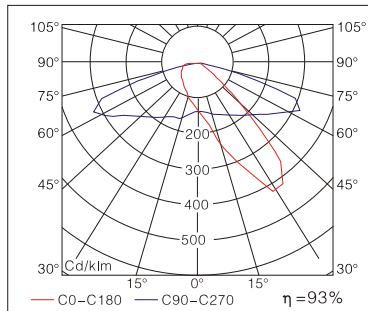

Type II

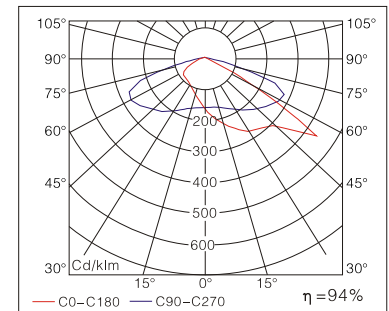

Type III

Ordering Information

Example: YML-1SL02-60-750-S-2-1

Company code	Voltage	Type	Power	Ra	Colour Temp.	Colour Options	Optic	Options	
YML	1	SL 02	40 (40W 4950Lumens)	7	27	S Silver (standard) B Black C Coffee	2 Type II 3 Type III	1 0~10V dimming	
	2		120~277VAC	40P (40W 6200Lumens)	70				2700K
	3		200~240VAC	60 (60W 7800Lumens)	8				30
	4		100~120VAC	60P (60W 9500Lumens)	80				3000K
	5		277~480VAC	90 (90W 10800Lumens)	9				40
	6		347~480VAC	90P (90W 13800Lumens)	90				4000K
	7								50
	8								5000K
	9								57
	10								5700K
				65					
				6500K					